





1.27 Series

Pin Header SMT

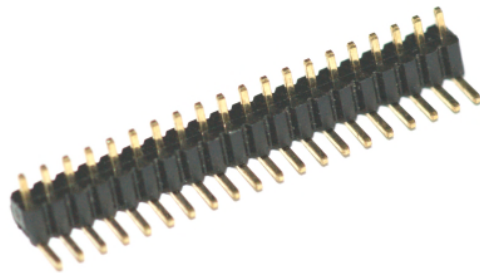

SPECIFICATIONS

Current Rating:
 1 Amps
Insulator resistance:
 1000 Megohms Min.
Dielectric withstanding:
 AC 500 V
Operation Temperature:
 -40i6 - +105i6
Contact Material:
 Brass
Insulator Material:
 Nylon-6T UL 94V-0
Color:Black
Finish:
 Gold flash

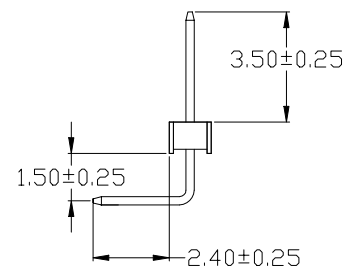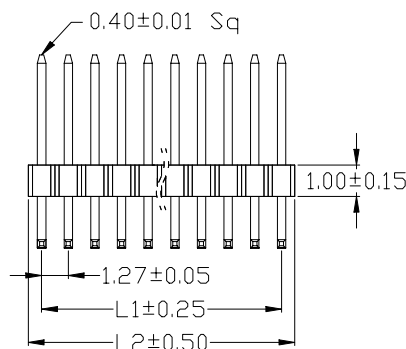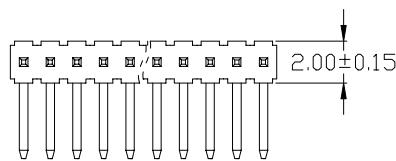

X 1 1 1 4 0 - X X D 1 0 X - 0 1 X

Insulator material
 N: Nylon-6T
 B: PBT
 L: LCP
 D: NY66

Row of pin
 1: single row
 2: dual row

Round pin
 40: 0.4mm

Number of Contact

Appearance of pin header
 S: Straight
 D: Right angle
 M: SMT

Color

Plating material
 G Gold Plated
 T Tin Plated
 H Duplex Plated

Plating thickness
 01 Normal
 10 10u"
 15 15u"