




# 1.27 Series

## Pin Header SMT

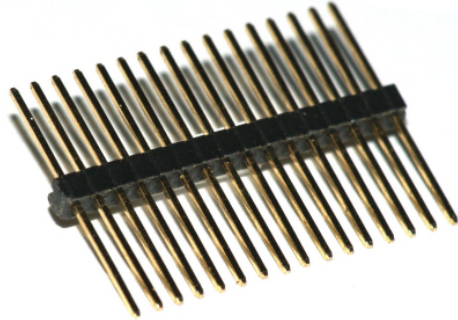

### SPECIFICATIONS

**Current Rating:**  
 1 Amps  
**Insulator resistance:**  
 1000 Megohms Min.  
**Dielectric withstanding:**  
 AC 500 V  
**Operation Temperature:**  
 -40°C - +105°C  
**Contact Material:**  
 Brass  
**Insulator Material:**  
 Nylon-6T UL 94V-0  
**Color:**Black  
**Finish:**  
 Gold flash

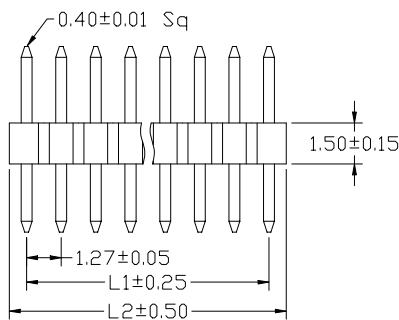

X 1 1 5 4 0 - X X S 1 0 X - 0 1 X

**Insulator material**  
 N: Nylon-6T  
 B: PBT  
 L: LCP  
 D: NY66

**Row of pin**  
 1: single row  
 2: dual row

**Round pin**  
 40:0.4mm

**Number of Contact**

**Appearance of pin header**  
 S: Straight  
 D: Right angle  
 M: SMT

Color

**Plating material**  
 G Gold Plated  
 T Tin Plated  
 H Duplex Plated

**Plating thickness**  
 01 Normal  
 10 10u"  
 15 15u"