


2.54mm MOLDING

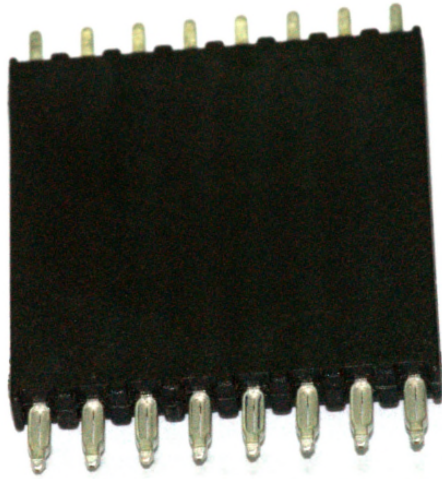

SPECIFICATIONS

Current Rating:

3 Amps

Voltage Rating:

230V

Insulator resistance:

5000 Megohms Min.

Contact Resistance:

20 mohms Max.

Dielectric withstanding:

AC 1000V minute

Operating Temperature:

-40° C - +105° C

Contact Material:

Phosphor Bronze

Insulator Material:

Nylon-6T UL94V-0

Color: Black

Finish:


Gold, Tin or Duplex plated

Duplex plated:



Gold plated on contact area

Tin on solder area

Normal matte tin



Recommended P.C.B. Layout

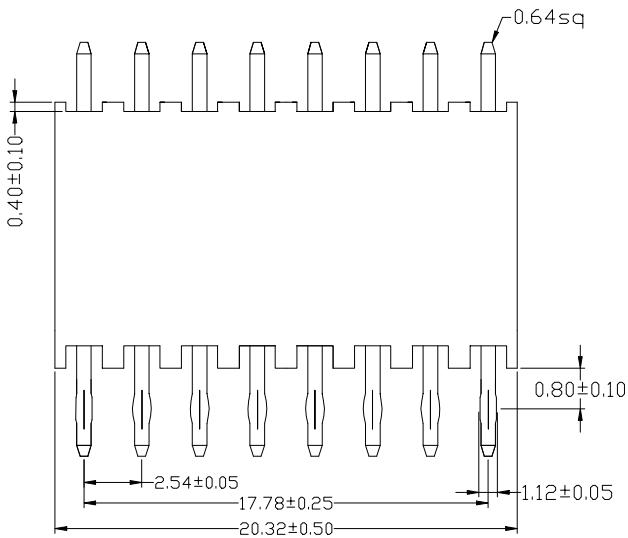

N 1 2 2 6 4 - 0 8 S 1 0 X - 0 1 T

Insulator material
N: Nylon-6T
B: PBT

Row of pin
1: single row
2: dual row

Plastic height
23: 22.85mm

Square pin
64: 0.64mm

Number of Contact

Color

Plating material
G Gold Plated
T Tin Plated
H Duplex Plated

Plating thickness
01 Normal
10 10u"
15 15u"