


# Other connectors Series



## DIN Socket

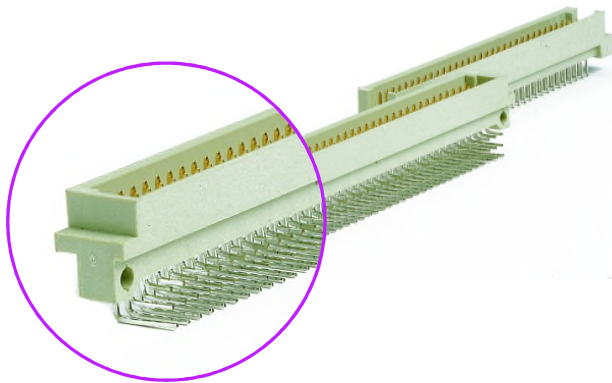

### SPECIFICATIONS

Material:  
 Housing:  
 30% Glass filled PBT UL94V-0.  
 Conyacts: Brass.

Electrical Characteristics:  
 Current Rating: 2 AMP.  
 Dielectric Withstanding Voltage:  
 AC 1000V For 1 minute.  
 Insulator Resistance:  
 30mΩmax. at DC 100mA.  
 Operating Temperature:  
 -55°C ~ +105°C.

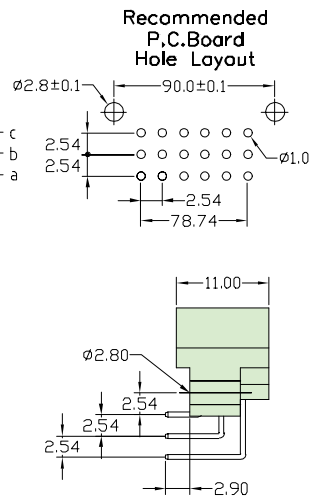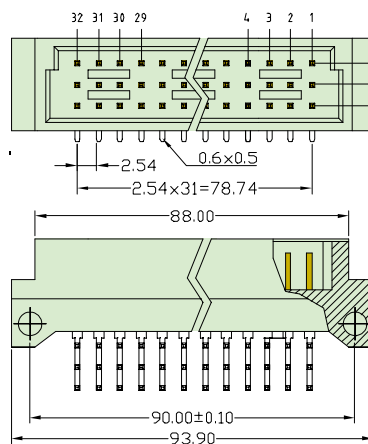

G 3 6 7 0 - x x D 1 0 - 0 1 T

Row of pin  
 [3] = triple row

Number of contacts

0- Plug

S10 - Straight  
 D10 - Right angle

Plating thickness

[0] Normal

Plating material

[T] Tin plated