
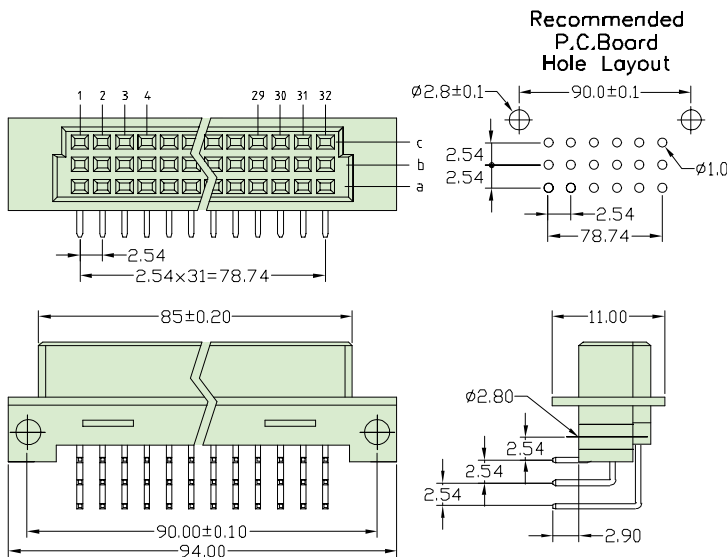


Other connectors Series

DIN Socket

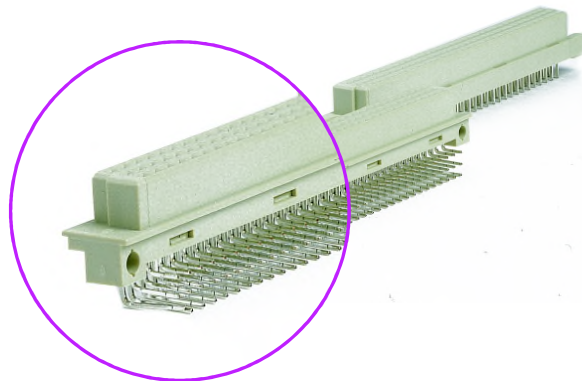

SPECIFICATIONS

Material:
Housing:
 30% Glass filled PBT UL94V-0.
Contacts:Brass.

Electrical Characteristics:
Current Rating: 2AMP.
Dielectric Withstanding Voltage:
 AC 1000V For 1 minute.
Insulator Resistance:
 1000mΩ. at DC 500V.
Contact Resistance:
 30mΩmax. at DC 100mA.
Operating Temperature:
 -55°C~+105°C.

G 3 6 7 6 - x x x 1 0 - 0 1 T

Row of pin
 [3] = triple row

Number of contacts

6- Socket

S10 - Straight
D10 - Right angle

Plating thickness
 [01] Normal

Plating material
 [T] Tin plated