


# 2.54 Series

## Angle

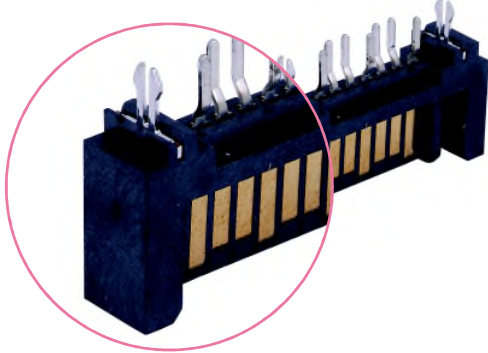

### SPECIFICATIONS

#### SPECIFICATIONS

Current Rating:  
1.0 Amp

Insulator resistance:  
1000 Megohms Min. AT DC 100V

Dielectric withstanding:  
AC 500V/minute, 1mA

Operating Temperature:  
-40° C ~ +105° C




Contact Material:  
Phosphor Bronze

Insulator Material:  
PBT 30% UL94V-0

Color: Black

Plating:  
Contact area:  
Gold flash plating 0.8μ" min.  
over 30~50μ" Nickel (Ref.)

Solder area:  
Tin/Lead plating 80~120μ" (Ref.)  
over 30~50μ" Nickel (Ref.)

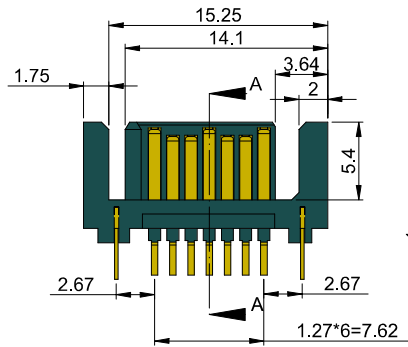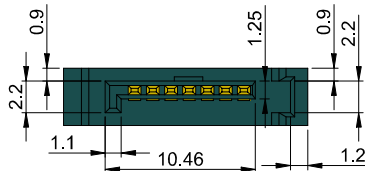

**B** **6** **7** **3** **0** - **0** **7** **S** **1** **0** - **X** **X** **X**

#### Insulator material

**N**-NYLON-6T  
**B**-PBT  
**L**-LCP

**M10** -SMT  
**S10** -Dip

#### Plating thickness

**01** Normal  
**03** 3 μ  
**05** 5 μ  
**10** 10 μ  
**15** 15 μ  
**30** 30 μ

#### Plating material

**G** Gold plated  
**T** Tin plated  
**P** Lead & Tin plated  
**H** Selective gold plated