

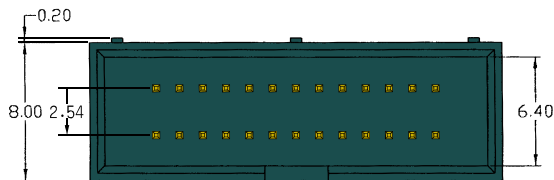


1.27x2.54 Series

Box Header SMT


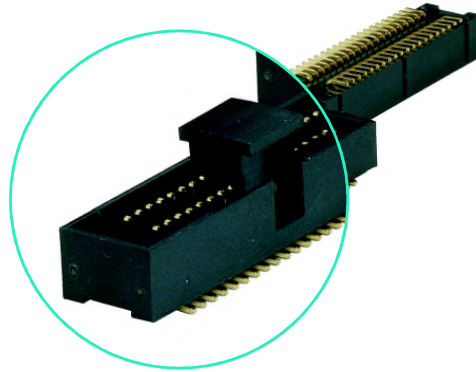


Recommended P.C.Board Hole Layout



SPECIFICATIONS

- Current Rating:
1.5 Amps
- Insulator resistance:
1000 Megohms Min.
- Dielectric withstanding:
AC 500 V
- Operating Temperature:
-40° C - +105° C
- Contact Material:
Brass
- Insulator Material:
Nylon-6T UL94V-0
- Color:Black
- Finish:
Gold flash

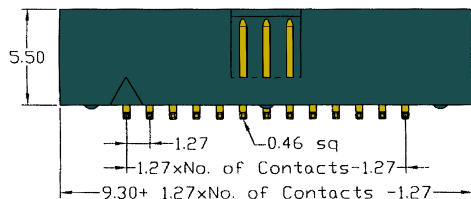

N 6 7 4 6 - x x M 1 0 - x x x

Box Header

Number of contacts

M10-SMT

Plating thickness

01	Normal
03	3 μ
05	5 μ
10	10 μ
15	15 μ
30	30 μ

Plating material

G	Gold plated
T	Tin plated
P	Lead & Tin plated
H	Selective gold plated