

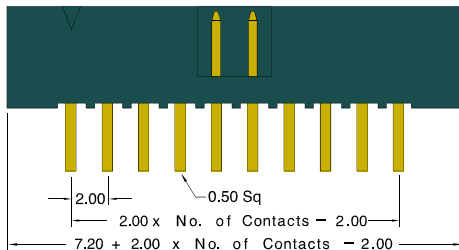
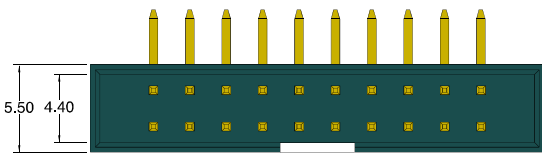


# 2.0 Series

## Box Header Right

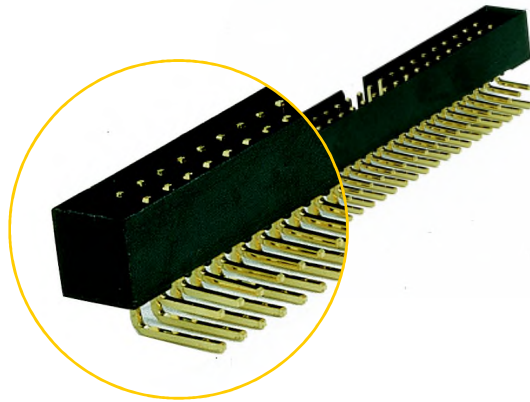

Recommended  
P.C.Board  
Hole Layout



### SPECIFICATIONS

Current Rating:  
2 Amps  
Voltage Rating:  
125V  
Insulator resistance:  
3000 Megohms Min.  
Contact Resistance:  
20m ohms Max  
Dielectric withstanding:  
AC 500 V  
Operating Temperature:  
-40° C - +105° C  
Contact Material:  
Brass  
Insulator Material:  
Nylon-6T UL 94V-0  
Color:Black  
Finish:  
Gold flash

N 6 8 5 0 - x x D 1 0 - x x x

Number of contacts  
06-68

D 1 0 -Right angle

Plating thickness

|    |        |
|----|--------|
| 01 | Normal |
| 03 | 3 μ    |
| 05 | 5 μ    |
| 10 | 10 μ   |
| 15 | 15 μ   |
| 30 | 30 μ   |

Plating material

|   |                       |
|---|-----------------------|
| G | Gold plated           |
| T | Tin plated            |
| P | Lead & Tin plated     |
| H | Selective gold plated |