

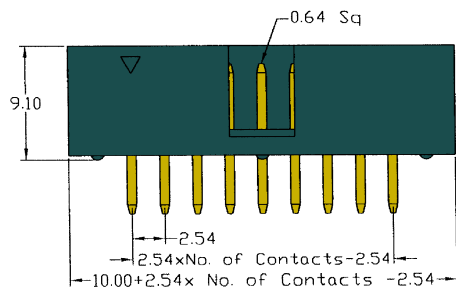
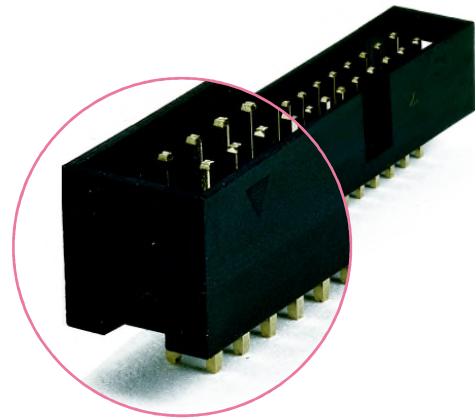


# 2.54 Series

## Box Header



### Recommended P.C.Board Hole Layout



### SPECIFICATIONS

- Current Rating: 3 Amps
- Voltage Rating: 230V
- Insulator resistance: 5000 Megohms Min.
- Contact Resistance: 20m ohms Max
- Dielectric withstanding: AC 500 V
- Operating Temperature: -40° C - +105° C
- Contact Material: Brass
- Insulator Material: Nylon-6T UL94V-0
- Color: Black
- Finish: Gold Flash

B 6 9 6 0 - x x S 1 0 - x x x

Number of contacts

S10-straight

#### Plating thickness

01	Normal
03	3 μ
05	5 μ
10	10 μ
15	15 μ
30	30 μ

#### Plating material

G	Gold plated
T	Tin plated
P	Lead & Tin plated
H	Selective gold plated