





# Other connectors Series

## D - Sub , Right Angle

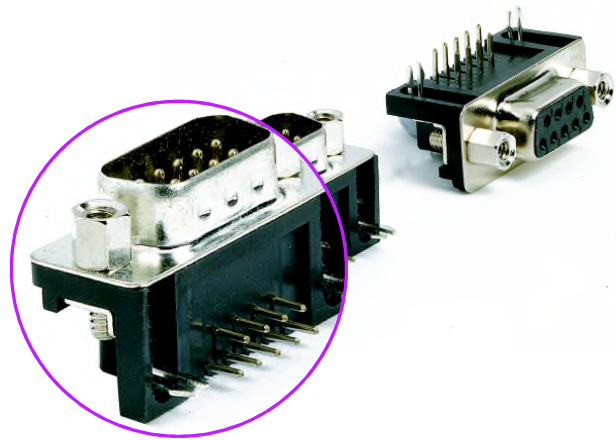

### SPECIFICATIONS

Current Rating:  
 5 Amps  
 Insulator resistance:  
 5000 Megohms Min.  
 Dielectric withstanding:  
 DC 500 V  
 Operating Temperature:  
 -55° - +105°C  
 Contact Material:  
 Brass  
 Insulator Material:  
 Standard: Nylon-P.B.T  
 Finish:  
 Gold over Nickel

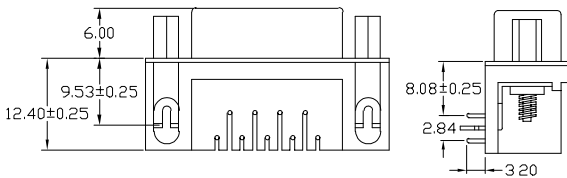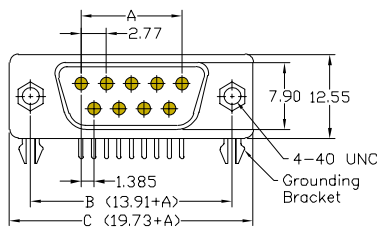

No. of Contacts	Dimension mm		
	A	B	C
9	16.92	24.99	30.81
15	25.26	33.32	39.14
25	38.96	47.04	53.04
37	54.42	63.50	69.32

D 7 5 0 0 - x x D 1 0 - 0 1 G

Number of contacts

D10 - right angle

Plating thickness

01 Normal

Plating material

G Gold plated