

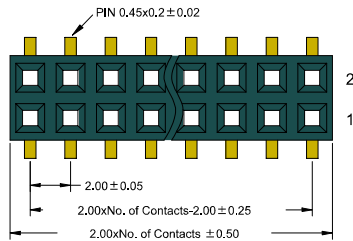
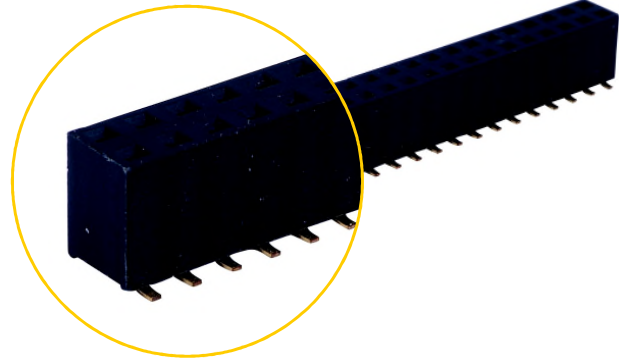



2.0 Series

Female Header, SMT

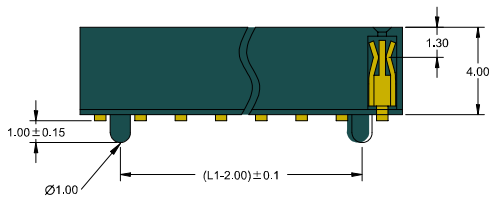

Recommended P.C.Board SMD Layout



SPECIFICATIONS

- Current Rating:
2 Amps
- Voltage Rating:
125V
- Insulator resistance:
3000 Megohms Min.
- Contact Resistance:
20m ohms Max
- Dielectric withstanding:
AC 500 V
- Operating Temperature:
-40° C - +105° C
- Contact Material:
Phosphor Bronze
- Insulator Material:
Nylon-6T UL 94V-0
Color:Black
- Finish:
Gold flash

N 8 2 4 2 - X X M 0 P X - 0 1 X

Insulator material
N: Nylon-6T
B: PBT
L: LCP
D: NY66

Row of pin
1:single row
2:dual row

Number of Contact

Appearance of pin header
S10: Straight
D10: Right angle
MOP:SMT

Color

Plating material
G Gold Plated
T Tin Plated
H Duplex Plated

Plating thickness
01 Normal
08 8u"
15 15u"