







2.54 Series

Female Header / Dual Row Entry

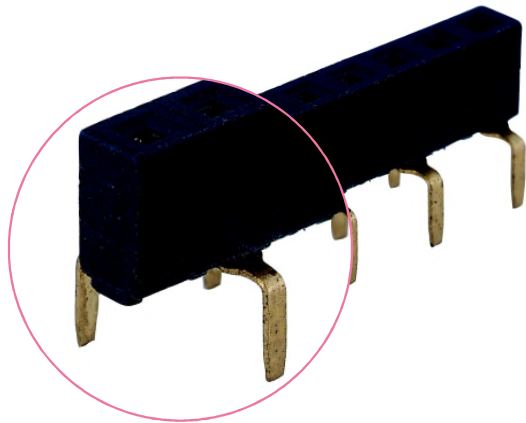

SPECIFICATIONS

Current Rating:
 3 Amps
 Voltage Rating:
 230V
 Insulator resistance:
 5000 Megohms Min.
 Contact Resistance:
 20m ohms Max
 Dielectric withstanding:
 AC 500 V
 Operating Temperature:
 -25° C - +125° C
 Contact Material:
 Brass
 Insulator Material:
 PBT UL94V-0
 Color:Black
 Finish:
 Gold flash

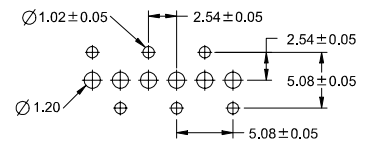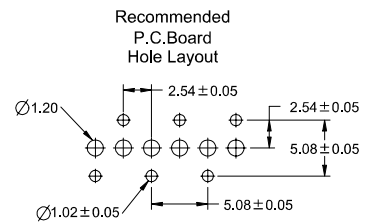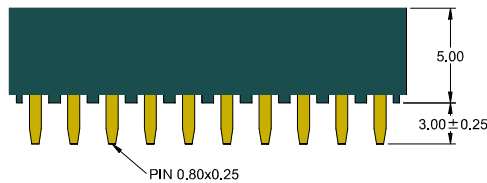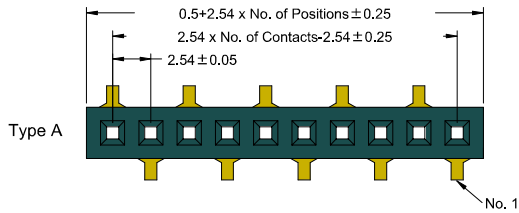

P 8 5 5 1 - X X C 1 0 - X X X

Row of pin
 1= single row

Number of contacts
 02~40

Dual entry

Plating thickness	
01	Normal
03	3 μ
05	5 μ
10	10 μ
15	15 μ
30	30 μ

Plating material	
G	Gold plated
T	Tin plated
P	Lead & Tin plated
H	Selective gold plated