


2.54 Series





Female Header

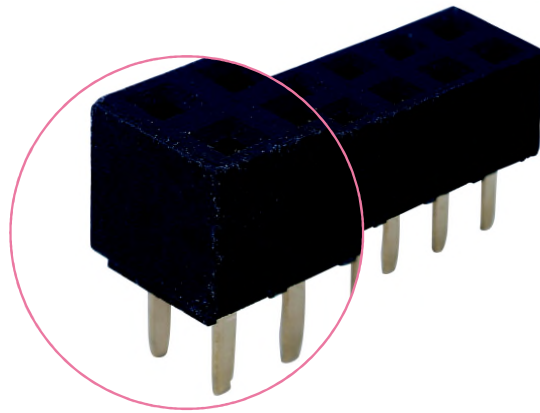

SPECIFICATIONS

Current Rating:
 3 Amps
 Voltage Rating:
 230V
 Insulator resistance:
 5000 Megohms Min.
 Contact Resistance:
 20m ohms Max
 Dielectric withstanding:
 AC 500 V
 Operating Temperature:
 -25° C - +125° C
 Contact Material:
 Brass
 Insulator Material:
 PBT UL94V-0
 Color: Black
 Finish:
 Gold flash

Recommended
P.C.Board
Hole Layout

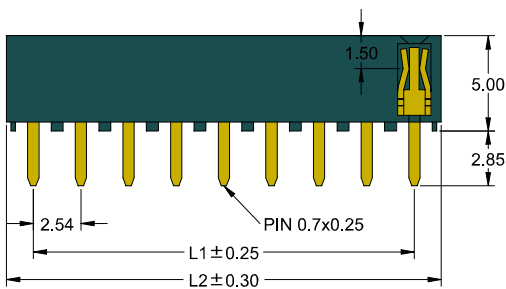

P 8 5 5 2 - X X S 1 0 - X X X

Number of contacts

S10 - Straight

Plating thickness

01	Normal
10	10 μ
⋮	⋮

Plating material

G	Gold plated
T	Tin Plate
H	Duplex Plate