


# 2.54 Series




## Female Header / Side Entry

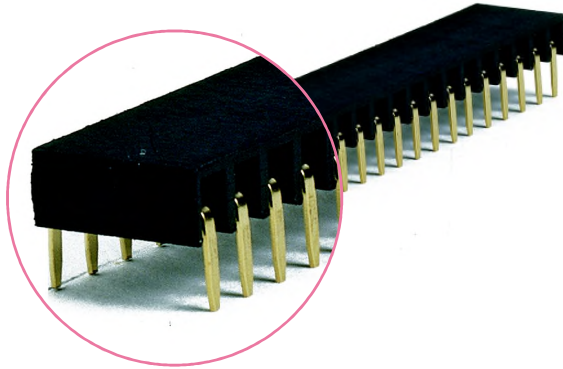

### SPECIFICATIONS

#### SPECIFICATIONS

**Current Rating:**  
 3 Amp  
**Insulator resistance:**  
 5000 Megohms Min.  
**Contact resistance:**  
 20 m ohms Max.  
**Dielectric withstanding:**  
 AC 1000V/minute  
**Operating Temperature:**  
 -40° ~ +105° C  
**Contact Material:**  
 Phosphor Bronze  
**Insulator Material:**  
 P.B.T UL94V-0  
**Color:** Black  
**Finish:**  
 Gold, Tin or Duplex plated  
 Standard: Gold flash all over  
 Duplex plated:  
 Gold plated on contact area  
 Tin on solder area

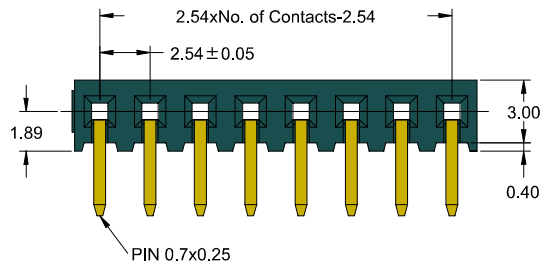

P 8 5 6 5 X X C 1 0 - X X X

Number of contacts

Side entry

#### Plating thickness

01	Normal
03	3 μ
05	5 μ
10	10 μ
15	15 μ
30	30 μ

#### Plating material

G	Gold plated
T	Tin plated
P	Lead & Tin plated
H	Selective gold plated