



1.27 Series

Female Header, SMT

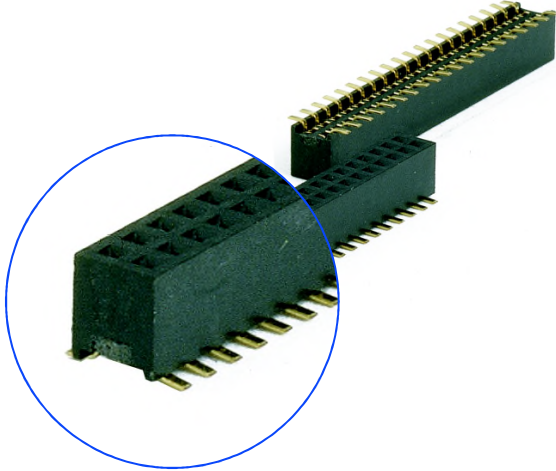

SPECIFICATIONS

Recommended P.C.Board SMD Layout

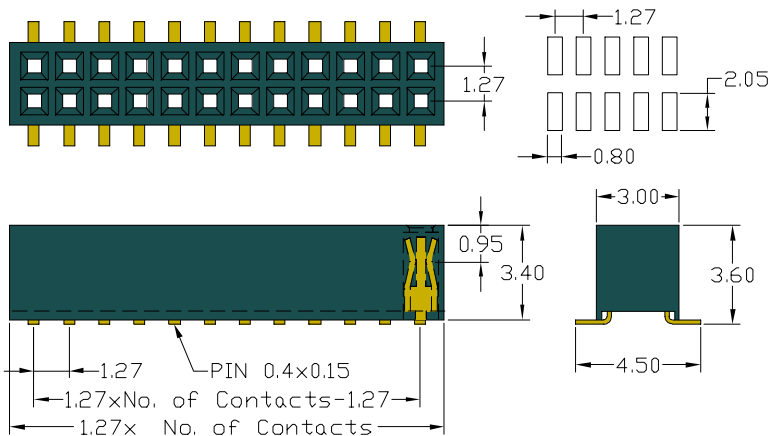

- Current Rating:
1 Amps
- Insulator resistance:
1000 Megohms Min.
- Dielectric withstanding:
AC 500 V
- Operating Temperature:
-40° C - +105° C
- Contact Material:
Brass
- Insulator Material:
L. C. P UL94V-0
- Color:Black
- Finish:
Gold flash

L 8 7 3 2 - X X M 1 0 X - 0 1 X

Insulator material
N: Nylon-6T
B: PBT
L: LCP
D: NY66

Row of pin
1: single row
2: dual row

Number of Contact

Appearance of pin header
S10: Straight
D10: Right angle
M1P: SMT

Color

Plating material
G Gold Plated
T Tin Plated
H Duplex Plated

Plating thickness
01 Normal
08 8u"
15 15u"