


1.27x2.54 Series

Female Header

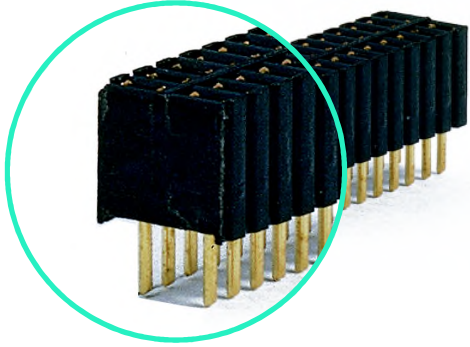

SPECIFICATIONS

Current Rating:
2 Amps

Insulator resistance:
1000 Megohms Min.

Contacts resistance:
20m ohms Max.

Dielectric withstanding:
AC 500V/minute



Operation Temperature:
-40° C - +105° C

Contact Material:
Brass




Insulator Material:
Nylon-6T UL94V-0

Color:Black

Finish:
Gold flash



Recommended P.C.Board Hole Layout

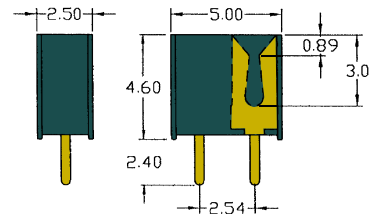

P 8 7 5 x - x x S 1 0 - x x x

Row of pin
 1-Single row
 2-Dual row

Number of contacts
 Straight

Plating thickness	
01	Normal
03	3 μ
05	5 μ
10	10 μ
15	15 μ
30	30 μ

Plating material	
G	Gold plated
T	Tin plated
P	Lead & Tin plated
H	Selective gold plated