



1.27x2.54 Series

Female Header, SMT

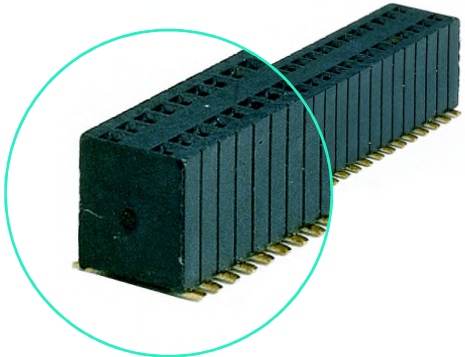

SPECIFICATIONS

Current Rating:
 2 Amps
 Insulator resistance:
 1000 Megohms Min.
 Contacts resistance:
 20m ohms Max.
 Dielectric withstanding:
 AC 500V/minute
 Operation Temperature:
 -40° C - +105° C
 Contact Material:
 Brass
 Insulator Material:
 Nylon-6T UL94V-0
 Color:Black
 Finish:
 Gold flash

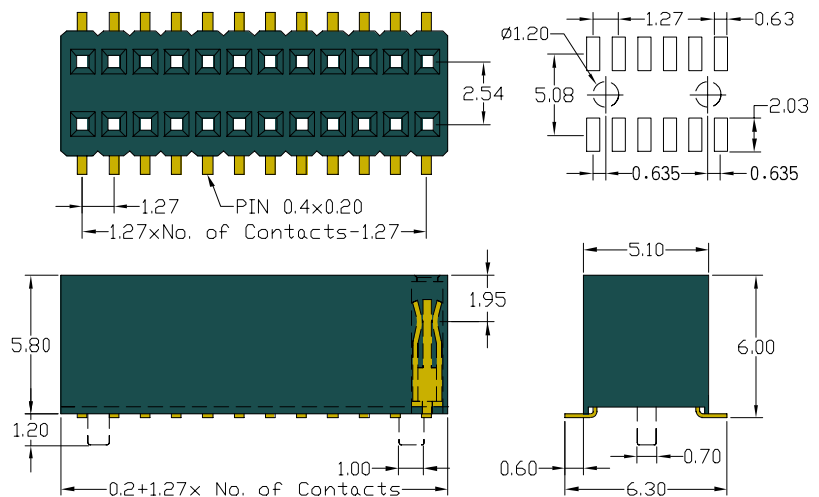

P 8 7 6 2 - x x M x x - x x x

Female header

Number of contacts

M10-SMT Type
 MOP-SMT with peg

Plating thickness

01	Normal
03	3 μ
05	5 μ
10	10 μ
15	15 μ
30	30 μ

Plating material

G	Gold plated
T	Tin plated
P	Lead & Tin plated
H	Selective gold plated