


Pin Header

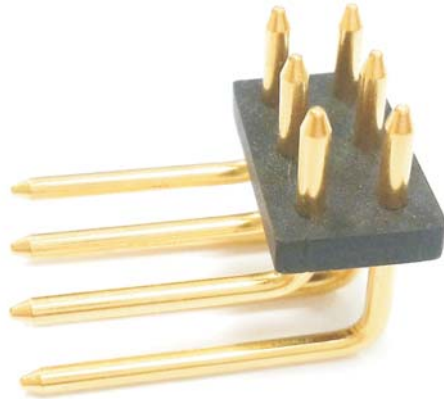

SPECIFICATIONS

PULL OUT FORCE REQUIREMENT FOR CONTACTS: min. 7.5N

CONTACTS MATERIAL:

Material: CuZn35Pb2 (62A)

(PIN针: LEMCO)

Plating: 1.5um Ni, partial plating
0.4um hard AU over Ni.

finish:

Gold Plated 15u" over 60u" Ni

INSULATOR MATERIAL:

Nytex MG-0034N-V0 B3 (PA66, 30%
glass filled, UL94V-0)

