





# Pin Header

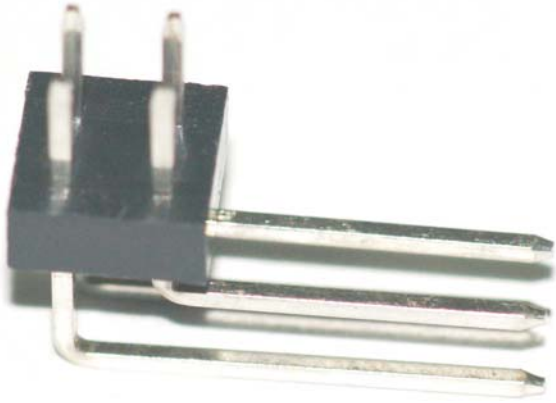

## SPECIFICATIONS

Current Rating:  
3 Amps

Insulator resistance:  
1000 Megohms Min.

Dielectric withstanding:  
AC 500 V

Operating Temperature:  
-40°C - +105°C

Contact Material:  
PHOSPHOR BRONZE

Insulator Material:  
NYTEX MG-0034N-V0 B1  
(PA66,30%glass filled,UL94V-0)

Color:Black

Finish:  
TIN PLATED

D 2 2 8 1 2 - X X D 1 0 X - 0 1 X

**Insulator material**  
N: Nylon-6T  
B: PBT  
L: LCP  
D: NY66

**Row of pin**  
1:single row  
2:dual row

**Number of Contact**

**Appearance of pin header**  
S10: Straight  
D10: Right angle  
M10:SMT

Color

**Plating material**  
G Gold Plated  
T Tin Plated  
H Duplex Plated

**Plating thickness**  
01 Normal  
10 10u"  
15 15u"