

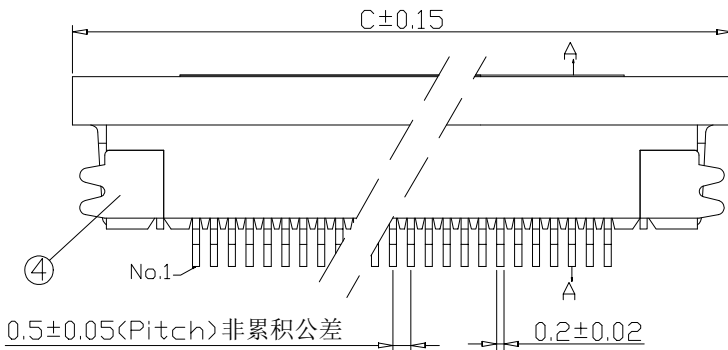
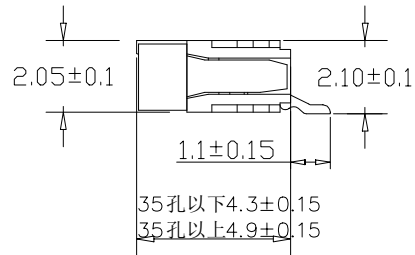
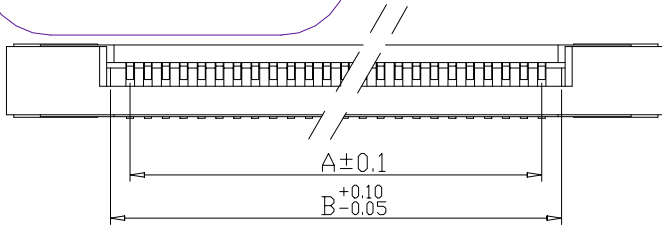



# 0.5B卧贴上/下接 FPC

## SPECIFICATIONS


Current rating:  
0.4Amps  
Insulator resistance:  
50 Megohms Min.  
Contact resistance:  
30 Millilohms Max.  
Dielectric withstanding:  
AC/DC 50V  
Operating temperature:  
-55°C - +85°C  
Contact Material:  
Phosphor Bronze  
Insulator Material:  
Nylon-46(本色) UL94V-0  
PPS BLACK UL94V-0  
Finish:  
Tin Plated

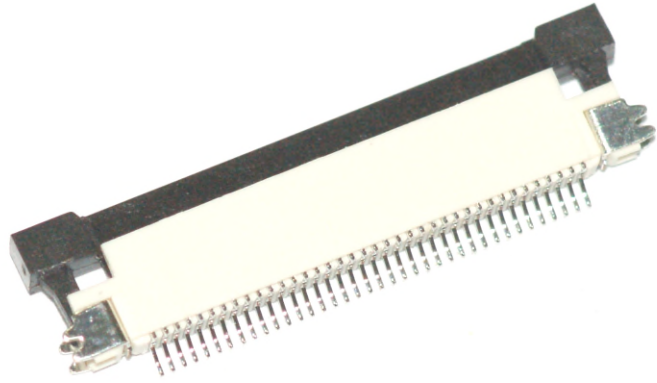

卧贴上接



卧贴下接

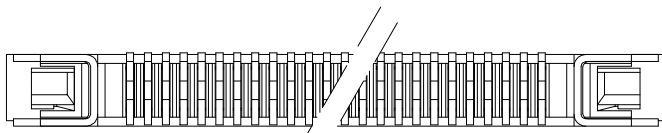

E 1 0 0 5 - X X X 1 0 W - 0 1 T

Insulator material  
E: Nylon-46  
L: LCP

Number of Contact

Appearance of pin header  
J10: 上接触  
J20: 下接触  
M10: SMT

Color

Plating material  
G Gold Plated  
T Tin Plated  
H Duplex Plated

Plating thickness  
01 Normal  
08 8u"  
15 15u"