

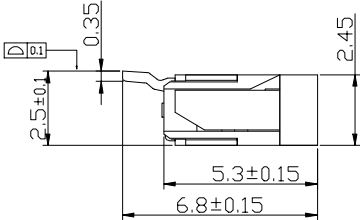
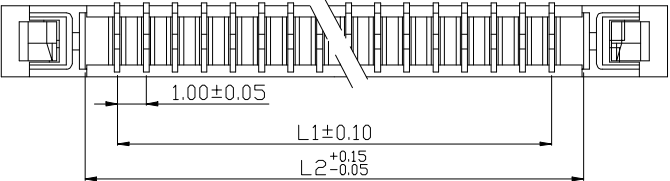



1.0卧贴上/下接FPC

SPECIFICATIONS

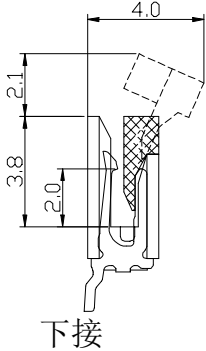

- Current rating: 0.5Amps
- Insulator resistance: 800 Megohms Min.
- Dielectric withstanding: AC/DC 50V
- Operating temperature: -25°C - +85°C
- Contact Material: Phosphor Bronze
- Insulator Material: Nylon-46(本色) UL94V-0
PPS BLACK UL94V-0
- Finish: Tin Plated

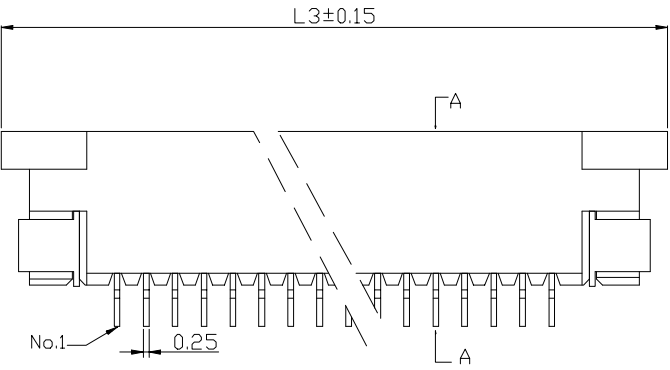

E 1 0 1 0 - X X X 1 0 W - 0 1 T

Insulator material
E: Nylon-46
L: LCP

Number of Contact

Color

Plating material
G Gold Plated
T Tin Plated
H Duplex Plated

Appearance of pin header
J10: 上接触
J20: 下接触
M10: 立贴M型

Plating thickness
01 Normal
08 8u"
15 15u"