


Pin Header

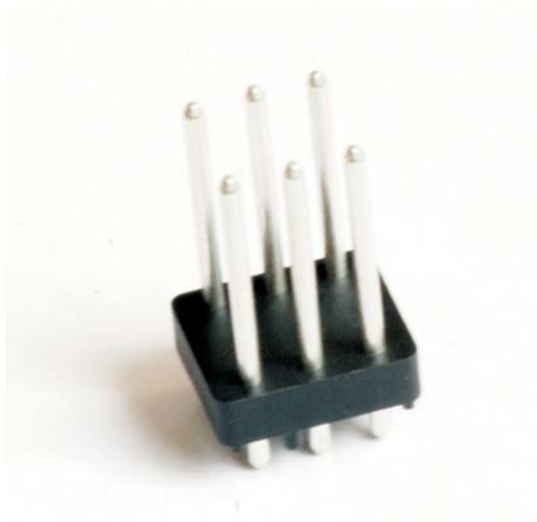

SPECIFICATIONS

Current Rating:

3 Amps

Insulator resistance:

1000 Megohms Min.

Dielectric withstanding:

AC 500 V

Operating Temperature:

-65 C - +250 C

UL746 RTI OF 85 CMIN

Contact Material:

Brass (C26000)

Insulator Material:

Nylon-6T 30%+GF UL94V-0



Color:Black

Finish:

ASTM 545 B-97 CLASS A (100MICRO INCHES MIN)

Matte Tin plated 100u" (雾锡)

QQ-N-290, CLASS 1 NI Plated 50u"

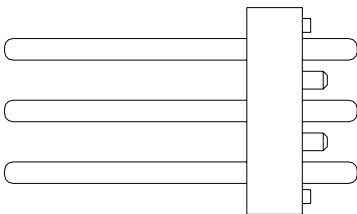

N 2 4 0 1 5 0 6 S 1 P B 0 1 T

Insulator material
N: Nylon-6T
B: PBT

Row of pin
1:single row
2:dual row
3:three tow

Plastic height
40:4.0mm

Square pin
15:1.55mm

Number of
Contact

Color

Plating material
G Gold Plated
T Tin Plated
H Duplex Plated

Plating thickness
01 Normal
10 10u"
20 20u"