


Pin Header

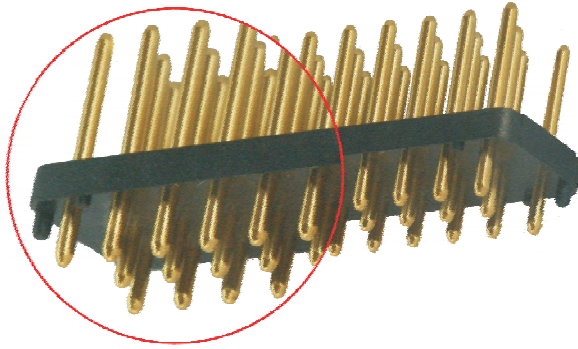

SPECIFICATIONS

Current Rating:

3 Amps

Insulator resistance:

1000 Megohms Min.

Dielectric

withstanding:

AC 500 V

Operating Temperature:

-65 C - +250 C

Contact Material:

Brass C26000

Insulator Material:

Nylon-6T+30%GF

UL94V-0



Color:Black

Finish:

MIL-G-45204C, TYPE

1, GRADE C, CLASS 00

Gold PLATED 20u"

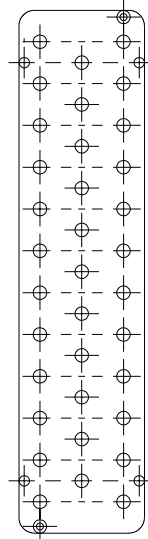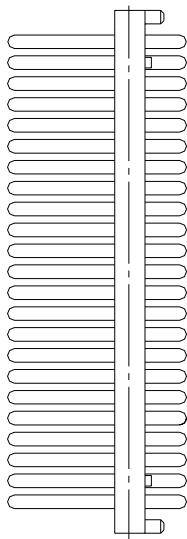

N 3 2 9 1 3 - 3 5 S 1 P X - 2 0 G

Insulator material
N: Nylon-6T
B: PBT

Row of pin
1:single row
2:dual row

Plastic height
23:23.80mm

Square pin
64:0.64mm

Number of
Contact

Color

Plating material
G Gold Plated
T Tin Plated
H Duplex Plated

Plating thickness
01 Normal
10 10u"
20 20u"